


工业管件

Industry Pipe Fitting




45° 90° 180° 长半径弯头


Long radius elbows(45° 90° 180°)



NO.1209001



NO.1209002



NO.1209003

公称通径 Nominal diameter		外径 Outside diameter	中心至端面的距离 Center to end		中心至中心的距离 Center to Center	90° L/R 弯头理论重量 Kg/pc 90° L/R Elbow Approx weight					
DN	NPS	OD	B	A	O	sch5S	sch10S	sch20/LG	sch40S/STD	sch80S/XS	sch80
DN15	1/2	18 21.3	16	28	76	0.04 0.05	0.05 0.06	0.06 0.07	0.06 0.08	0.08 0.10	0.08 0.10
DN20	3/4	25 26.7	19	28	76	0.06 0.06	0.07 0.08	0.09 0.09	0.09 0.10	0.12 0.13	0.12 0.13
DN25	1	32 33.4	22	28	76	0.07 0.08	0.12 0.13	0.14 0.14	0.14 0.15	0.19 0.19	0.19 0.19
DN32	1 1/4	38 42.2	25	48	96	0.11 0.13	0.18 0.20	0.21 0.23	0.23 0.26	0.30 0.34	0.30 0.34
DN40	1 1/2	45 48.3	29	57	114	0.16 0.17	0.26 0.28	0.30 0.32	0.34 0.37	0.45 0.49	0.45 0.49
DN50	2	57 60.3	35	76	152	0.27 0.29	0.45 0.47	0.57 0.61	0.62 0.65	0.85 0.90	0.85 0.90
DN65	2 1/2	76 73	44	95	190	0.58 0.55	0.82 0.79	0.97 0.93	1.35 1.30	1.79 1.71	1.79 1.71
DN80	3	89 101.6	51	114	228	0.82 1.09	1.17 1.56	1.51 2.03	2.04 2.85	2.76 3.92	2.76 3.92
DN90	3 1/2	108 114	57	133	266	1.32 1.40	1.90 2.01	2.47 2.61	3.64 3.85	5.05 5.35	5.05 5.35
DN100	4	133 141.3	64	152	304	2.67 2.84	3.27 3.47	4.74 5.05	6.14 6.54	8.72 9.31	8.72 9.31
DN125	5	139.7 168.3	79	190	380	2.81 4.10	3.43 5.01	4.99 7.29	6.46 10.24	9.19 15.41	9.19 15.41
DN150	6	159 165	95	229	458	3.86 4.01	4.72 4.91	6.88 7.14	9.64 10.03	14.50 15.09	14.50 15.09
DN200	8	219 216	127	305	610	7.12 7.03	9.63 9.49	15.94 15.71	20.51 20.22	31.17 30.71	31.17 30.71
DN250	10	273 267.4	159	381	762	13.62 13.34	16.74 16.39	24.97 24.44	36.33 35.56	49.12 18.06	57.83 56.57
DN300	12	325 323.9 318	190	457	914	22.66 22.58 22.16	26.10 26.01 25.53	35.79 35.66 35.00	53.58 53.40 52.39	70.69 70.44 49.11	95.81 95.46 93.63
DN350	14	377 355.6	222	533	1066	30.71 28.95	36.98 34.86	61.36 57.80	72.80 68.56	96.17 90.52	141.75 133.27
DN400	16	426 406.4	254	610	1220	42.05 40.09	47.90 45.67	79.55 75.82	94.42 89.98	124.87 118.95	206.35 196.35

上述尺寸符合 GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9 标准。

Above dimensions acc.to GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9.


理论重量按 ASME B36.10M、B36.19M 标准壁厚测算 (sch20S/LG、按 GB/T 12459、GB/T 13401 标准壁厚测算)。

Weights are approximate and based on manufacture's data , according to ASME B36.10M、B36.19M ,


(sch20S/LG、Weights are approximate and based on manufacture's data,according to GB/T 12459、GB/T 13401).

90° 180° 短半径弯头

Short Radius Elbows(90° 180°)



NO.1209004



NO.1209005

公称通径 Nominal diameter		外径 Outside diameter	中心至端面的距离 Center to end	中心至中心的距离 Center to Center	90° S/R 弯头理论重量 Kg/pc 90° S/R Elbow Approx weight					
DN	NPS	OD	A	O	sch5S	sch10S	sch20/LG	sch40S/STD	sch80S/XS	sch80
DN25	1	32 33.4	25	50	0.05 0.05	0.08 0.08	0.09 0.09	0.09 0.10	0.12 0.13	0.12 0.13
DN32	1 1/4	38 42.2	32	64	0.07 0.08	0.12 0.14	0.14 0.16	0.15 0.17	0.20 0.23	0.20 0.23
DN40	1 1/2	45 48.3	38	76	0.11 0.11	0.17 0.19	0.20 0.21	0.23 0.24	0.30 0.33	0.30 0.33
DN50	2	57 60.3	51	102	0.18 0.19	0.30 0.32	0.38 0.41	0.41 0.44	0.57 0.60	0.57 0.60
DN65	2 1/2	76 73	64	138	0.39 0.37	0.56 0.53	0.65 0.62	0.91 0.87	1.21 1.15	1.21 1.15
DN80	3	89 101.6	76	152	0.54	0.78	1.01	1.36	1.84	1.84
DN90	3 1/2	108 114	89	178	0.73	1.04	1.36	1.91	2.62	2.62
DN100	4	133 141.3	102	204	0.89 0.94	1.27 1.35	1.65 1.75	2.44 2.59	3.39 3.59	3.39 3.59
DN125	5	139.7 168.3	127	254	1.79 1.90 1.88	2.18 2.32 2.30	3.17 3.38 3.34	4.10 4.37 4.32	5.83 6.22 6.14	5.83 6.22 6.14
DN150	6	159 165	152	304	2.72 2.57 2.66	3.32 3.14 3.26	4.84 4.56 4.74	6.79 6.40 6.65	10.23 9.63 10.02	10.23 9.63 10.02
DN200	8	219 216	203	406	4.72 4.68	6.41 6.32	10.61 10.64	13.65 13.46	20.74 20.44	20.74 20.44
DN250	10	273 267.4	254	508	9.08 8.89	11.16 10.92	16.64 16.29	24.22 23.70	32.75 32.04	38.55 37.72
DN300	12	325 323.9 318	305	610	15.12 15.07 14.79	17.43 17.36 17.04	23.88 23.80 23.36	35.76 35.64 34.97	47.18 47.01 46.12	63.94 96.71 92.49
DN350	14	377 355.6	356	712	20.51 19.66	24.70 23.28	40.99 38.61	48.62 45.79	84.24 50.46	94.97 89.01
DN400	16	426 406.4	406	812	27.98 26.68	31.88 30.40	52.95 50.47	62.84 59.89	83.11 79.17	137.34 130.69
DN450	18	478 457.2	457	914	35.38 33.83	40.32 38.54	67.01 64.05	79.57 75.04	153.2 100.61	192.90 184.06

上述尺寸符合 GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9 标准。

Above dimensions acc.to GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9.

理论重量按 ASME B36.10M、B36.19M 标准壁厚测算 (sch20S/LG、按 GB/T 12459、GB/T 13401 标准壁厚测算)。

Weights are approximate and based on manufacture's data , according to ASME B36.10M、B36.19M ,


(sch20S/LG、Weights are approximate and based on manufacture's data,according to GB/T 12459、GB/T 13401).

三通 (等径、异径)


Tees(straight and reducing)



NO.1209006



NO.1209007



公称通径 Nominal diameter		外径 Outside diameter	中心至端面的距离 Center to end		理论重量 Kg/pc Approx weight					
DN	NPS	D1×D2	C	M	sch55	sch10S	sch20/LG	sch40S/STD	sch80S/XS	sch80
DN20×20	3/4×3/4	25×25 26.7×26.7	29	29	0.07 0.08	0.10 0.11	0.13 0.15	0.13 0.15	0.16 0.18	0.16 0.18
DN20×15	3/4×1/2	25×18 26.7×21.3	29	29	0.06 0.7	0.19 0.10	0.12 0.13	0.12 0.13	0.15 0.16	0.15 0.16
DN25×25	1×1	32×32 33.4×33.4	38	38	0.11 0.12	0.19 0.20	0.23 0.25	0.23 0.25	0.30 0.32	0.30 0.32
DN25×20	1×3/4	32×25 33.4×26.7	38	38	0.10 0.11	0.18 0.19	0.22 0.24	0.22 0.24	0.28 0.31	0.28 0.31
DN25×15	1×1/2	32×18 33.4×21.3	38	38	0.09 0.10	0.17 0.18	0.21 0.23	0.21 0.23	0.27 0.30	0.27 0.30
DN32×32	1 1/4×1 1/4	38×38 42.2×42.2	48	48	0.19 0.20	0.36 0.39	0.42 0.52	0.42 0.52	0.63 0.73	0.63 0.73
DN32×25	1 1/4×1	38×32 42.2×33.4	48	48	0.18 0.19	0.33 0.35	0.40 0.42	0.40 0.42	0.58 0.68	0.58 0.68
DN32×20	1 1/4×3/4	38×25 42.2×26.7	48	48	0.17 0.18	0.31 0.32	0.38 0.40	0.38 0.40	0.55 0.65	0.55 0.65
DN32×15	1 1/4×1/2	38×18 42.2×21.3	48	48	0.16 0.17	0.30 0.31	0.36 0.38	0.36 0.38	0.52 0.62	0.52 0.62
DN40×40	1 1/2×1 1/2	45×45 48.3×48.3	57	57	0.35 0.45	0.59 0.69	0.78 0.88	0.78 0.88	1.08 1.18	1.08 1.18
DN40×32	1 1/2×1 1/4	45×38 48.3×42.2	57	57	0.32 0.42	0.54 0.65	0.72 0.82	0.72 0.82	0.99 1.09	0.99 1.09
DN40×25	1 1/2×1	45×32 48.3×33.4	57	57	0.27 0.37	0.45 0.65	0.60 0.80	0.60 0.80	0.83 1.08	0.83 1.08
DN40×20	1 1/2×3/4	45×25 48.3×26.7	57	57	0.26 0.26	0.44 0.64	0.58 0.58	0.58 0.58	0.80 1.00	0.80 1.00
DN40×15	1 1/2×1/2	45×18 48.3×21.3	57	57	0.25 0.35	0.42 0.62	0.56 0.66	0.56 0.66	0.78 0.78	0.78 0.78
DN50×50	2×2	57×57 60.3×48.3	64	64	0.49 0.50	1.03 1.05	1.15 1.18	1.15 1.18	1.65 1.67	1.65 1.67
50×40	2×1 1/4	57×45 60.3×48.3	64	60	0.44 0.45	0.93 0.95	1.04 1.06	1.04 1.06	1.48 1.50	1.48 1.50
DN50×32	2×1 1/4	57×38 60.3×42.2	64	57	0.40 0.43	0.81 0.89	0.98 1.00	0.98 1.00	1.37 1.42	1.37 1.42
DN50×25	2×1	57×32 60.3×33.4	64	51	0.39 0.40	0.72 0.84	0.92 0.94	0.92 0.94	1.31 1.34	1.31 1.34
DN50×20	2×3/4	57×25 60.3×26.7	64	44	0.37 0.38	0.87 0.90	0.87 0.90	0.87 0.90	1.24 1.27	1.24 1.27

上述尺寸符合 GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9 标准。

Above dimensions acc.to GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9.

理论重量按 ASME B36.10M、B36.19M 标准壁厚测算。


Weights are approximate and based on manufacture's data , according to ASME B36.10M、B36.19M.

三通 (等径、异径)


Tees(straight and reducing)



NO.1209008



NO.1209009



公称通径 Nominal diameter		外径 Outside diameter	中心至端面的距离 Center to end		理论重量 kg/pc Approx weight					
DN	MPS	D1xD2	C	M	sch55	sch105	sch20/LG	sch405/STD	sch805/XS	sch80
DN65x65	21/2x2 1/2	76x76 73.0x73.0	76	76	0.87 0.86	1.21 1.25	2.10 2.12	2.10 2.12	2.80 2.88	2.80 2.88
DN65x50	21/2x2	76x57 73.0x60.3	76	70	0.82 0.81	1.17 1.16	2.00 1.98	2.00 1.98	2.70 2.65	2.70 2.65
DN65x40	21/2x1 1/2	76x45 73.0x48.3	76	67	0.77 0.76	1.11 1.10	1.89 1.88	1.89 1.88	2.56 2.55	2.56 2.55
DN65x32	21/2x1 1/4	76x38 73.0x42.2	76	64	0.75 0.74	1.10 1.08	1.80 1.89	1.80 1.89	2.50 2.25	2.50 2.25
DN65x25	21/2x1	76x32 73.0x33.4	76	59	0.76 0.70	1.10 1.07	1.86 1.81	1.86 1.81	2.53 2.08	2.53 2.08
DN80x80	3x3	89x89	86	86	1.16	1.68	3.02	3.02	4.19	4.19
80x65DN	3x2 1/2	89x76 88.9x73.0	86	83	1.11 1.10	1.62 1.60	2.89 2.87	2.89 2.87	1.02 3.98	1.02 3.98
DN80x50	3x2	89x57 88.9x60.3	86	76	1.06 1.07	1.53 1.55	2.76 2.79	2.76 2.79	3.81 3.83	3.81 3.85
DN80x40	3x1 1/2	89x45 88.9x48.3	86	73	1.01 1.03	1.40 1.50	2.67 2.69	2.67 2.69	3.70 3.73	3.70 3.73
DN80x32	3x1 1/4	89x38 88.9x42.2	86	70	1.00 1.00	1.48 1.45	2.65 2.60	2.65 2.60	3.68 3.60	3.68 3.60
DN90x90	31/2x2 1/2	101.6x101.6	95	95	1.33	1.92	3.61	3.61	5.08	5.08
DN90x80	31/2x3	101.6x88.9	95	92	1.26	1.82	3.43	3.43	4.83	4.83
DN90x65	31/2x2 1/2	101.6x73.0	95	89	1.22	1.76	3.32	3.32	4.67	4.67
DN90x50	31/2x2	101.6x60.3	95	83	1.20	1.73	3.25	3.25	4.57	4.57
DN90x40	31/2x1 1/2	101.6x48.3	95	79	1.17	1.70	3.21	3.21	4.51	4.51
DN00x100	4x4	108x108 114.3x114.3	105	105	1.66 1.75	2.41 2.54	4.75 5.01	4.75 5.01	6.75 7.12	6.75 7.12
DN100x90	4x3 1/2	114.3x114.3	105	102	1.70	2.46	7.85	4.85	6.89	6.89
DN100x80	4x3	108x89 114.3x88.9	105	98	1.55 1.61	2.24 2.33	4.42 4.60	4.42 4.60	6.27 6.52	6.27 6.52
DN100x65	4x2 1/2	108x76 114.3x73.0	105	95	1.53 1.60	2.21 2.31	4.36 4.56	4.36 4.36	6.50 6.50	6.50 6.50

上述尺寸符合 GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9 标准。


Above dimensions acc.to GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9.

理论重量按 ASME B36.10M、B36.19M 标准壁厚测算。


Weights are approximate and based on manufacture's data , according to ASME B36.10M、B36.19M.

三通 (等径、异径)

Tees(straight and reducing)



NO.1209010



NO.1209011

公称通径 Nominal diameter		外径 Outside diameter	中心至端面的距离 Center to end		理论重量 kg/pc Approx weight					
DN	MPS	D1xD2	C	M	sch55	sch105	sch20/LG	sch405/STD	sch805/XS	sch80
DN100x50	4x2	108x57 114.3x60.3	105	89	1.51 1.57	2.19 2.29	4.32 4.41	4.32 4.41	6.13 6.12	6.13 6.12
DN100x40	4x1 1/2	108x45 114.3x48.3	105	86	1.50 1.55	2.09 2.24	4.22 4.00	4.22 4.00	1.03 6.02	1.03 6.02
DN125x125	5x5	133x133 141.3x141.3	124	124	3.18 3.37	3.91 4.14	7.53 7.98	7.53 7.98	10.9 11.6	10.9 11.6
DN125x100	5x4	133x108 141.3x114.3	124	117	3.03 3.15	3.73 3.90	7.20 7.52	7.20 7.52	10.4 10.8	10.4 10.8
DN125x90	5x3 1/2	141.3x101.6	124	114	3.09	3.83	7.39	7.39	10.6	10.6
DN125x80	5x3	133x89 141.3x88.9	124	111	2.90 3.02	3.59 3.74	6.92 7.21	6.92 7.21	10.0 10.4	10.0 10.4
DN125x65	5x2 1/2	133x76 141.3x73.0	124	108	2.85 3.00	3.59 3.73	6.92 7.20	6.92 7.20	10.0 10.4	10.0 10.4
DN150x50	5x2	113x57 141.3x60.3	124	105	2.80 3.92	3.58 3.73	6.92 7.20	6.92 7.20	10.0 10.4	10.0 10.4
DN150x150	6x6	159x159 168.3x168.3	143	143	4.09 4.32	5.03 5.31	10.5 11.1	10.5 11.1	16.2 17.1	16.2 17.1
DN150x125	6x5	159x133 168.3x141.3	143	137	3.84 4.13	4.73 5.08	9.88 10.6	9.88 10.6	15.2 16.3	15.2 16.3
DN150x100	6x4	159x108 168.3x114.3	143	130	3.76 3.95	4.64 4.87	9.71 10.2	9.71 10.2	14.9 15.6	14.9 15.6
DN150x90	6x3 1/2	168.3x101.6	143	127	3.91	4.82	10.1	10.1	15.5	15.5
DN150x80	6x3	159x89 168.3x88.9	143	124	3.72 3.93	4.56 4.82	9.56 10.0	9.56 10.0	14.7 15.3	14.7 15.3
DN150x65	6x2 1/2	159x76 168.3x73.0	143	121	3.70 3.81	4.51 4.72	9.51 10.0	9.51 10.0	14.6 15.2	14.6 15.2
DN200x200	8x8	219x219	178	178	7.72	10.4	22.8	22.8	36.4	35.4
DN200x150	8x6	219x159 219.1x168.3	178	168	6.74 7.17	9.20 9.74	19.9 21.1	19.9 21.1	30.9 32.8	30.9 32.8
DN200x125	8x5	219x133 219.1x141.3	178	162	6.61 7.03	8.98 9.55	19.5 20.7	19.5 20.7	30.2 32.2	30.2 32.2
DN200x100	8x4	219x108 219.1x114.3	178	156	6.43 6.84	8.73 9.39	19.0 19.9	20.5 20.2	29.4 31.3	29.4 31.3
DN200x90	8x3 1/2	219.1x101.6	178	152	6.84	9.18	19.8	2.01	31.1	31.1

上述尺寸符合 GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9 标准。

Above dimensions acc.to GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9.

理论重量按 ASME B36.10M、B36.19M 标准壁厚测算。


Weights are approximate and based on manufacture's data , according to ASME B36.10M、B36.19M.

三通 (等径、异径)


Tees(straight and reducing)



NO.1209012



NO.1209013



公称通径 Nominal diameter		外径 Outside diameter	中心至端面的距离 Center to end		理论重量 kg/pc Approx weight					
DN	MPS	D1xD2	C	M	sch55	sch105	sch20/LG	sch405/STD	sch805/XS	sch80
DN250x250	10x10	273x273	216	216	14.6	18.04	40.04	40.04	25.8	65.12
DN250x200	10x8	273x219	216	203	13.3	13.4	36.4	36.4	49.8	59.2
DN250x120	10x6	273x159 273.1x168.3	216	194	11.4 12.1	15.0 15.0	31.4 33.4	31.4 33.4	42.8 42.7	50.7 54.0
DN250x125	10x5	273x133 273.1x141.3	216	191	11.2 11.9	14.6 14.6	30.7 32.7	30.7 32.9	45.4 41.8	49.7 52.9
DN250x100	10x4	273x108 273.1x114.3	216	184	11.0 11.7	14.4 14.4	30.3 32.2	30.3 32.2	44.5 41.2	49.0 52.1
DN300x300	12x12	325x325 323.9x323.9	254	254	21.5 21.5	14.8 24.8	51.8 51.8	56.1 56.0	42.9 69.0	95.0 95.0
DN300x250	12x10	325x273 323.9x273.1	254	241	20.4 20.3	23.6 23.4	49.2 49.1	53.3 53.1	69.0 65.6	90.3 90.2
DN300x200	12x8	325x219 323.9x219.1	254	229	20.2 20.0	23.3 23.1	48.4 48.2	52.4 52.2	65.2 64.4	88.6 88.4
DN300x150	12x6	325x159 323.9x168.3	254	219	18.4 19.5	22.5 22.7	44.3 47.1	47.9 51.0	64.2 59.0	81.2 89.4
DN300x125	12x5	325x133 323.9x141.3	254	216	18.0 19.1	20.8 22.1	43.6 46.3	47.1 50.2	62.7 57.8	79.6 84.6
DN350x350	14x14	377x377 355.6x355.6	279	279	27.4 25.7	33.1 31.1	66.1 62.0	77.2 72.5	61.5 88.0	132 124
DN350x300	14x12	377x325 355.6x323.9	279	270	25.8 24.2	31.1 29.2	62.1 58.3	72.5 68.2	82.7 77.7	124 116
DN350x250	14x10	377x273 355.6x273.1	279	257	25.1 23.7	30.3 28.6	60.5 57.0	70.8 66.7	80.7 76.0	121 114
DN350x200	14x8	377x219 355.6x219.1	279	248	24.6 23.1	29.7 27.9	59.2 55.7	69.2 65.2	78.0 74.2	118 111
DN350x150	14x6	377x159 355.6x168.3	279	238	24.0 22.3	29.0 27.1	57.9 54.2	67.8 64.8	77.1 77.8	115 110
DN400x400	16x16	426x426 406.4x406.4	305	305	33.1 31.4	38.0 36.1	75.9 72.3	101 94.4	101 96.1	170 162
DN400x350	16x14	426x377 406.4x355.6	305	305	32.0 30.4	36.8 34.9	73.6 70.1	98.1 93.4	97.8 92.9	179 170
DN400x300	16x12	426x325 406.4x323.9	305	295	31.0 28.2	35.6 34.4	71.4 69.1	95.2 90.8	94.7 89.2	173 168
DN400x250	16x10	426x273 406.4x273.1	305	283	30.2 28.7	34.7 33.0	69.9 66.6	93.1 88.7	92.5 87.8	169 161

上述尺寸符合 GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9 标准。


Above dimensions acc.to GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9.

理论重量按 ASME B36.10M、B36.19M 标准壁厚测算。


Weights are approximate and based on manufacture's data , according to ASME B36.10M、B36.19M.

大小头 (同心、偏心)

Reducers(concentric and eccentric)

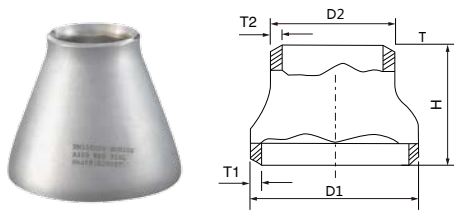

NO.1209014

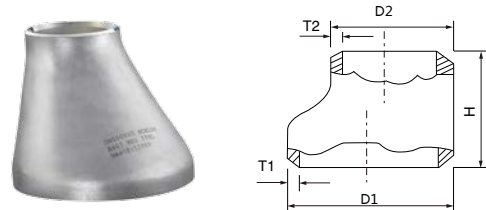

NO.1209015

公称通径 Nominal diameter		外径 Outside diameter	端面至端面的距离 End to end	理论重量 kg/pc Approx weight					
DN	NPS	D1xD2	H	sch5s	sch10s	sch20/lg	sch40s/std	sch80s/xs	Sch80
DN20x15	3/4x1/2	25x18 26.7x21.3	38	0.03 0.04	0.04 0.04	0.05 0.06	0.05 0.06	0.07 0.07	0.07 0.07
DN25x20	1x3/4	32x25 33.4x26.7	51	0.06 0.06	0.09 0.10	0.11 0.11	0.11 0.11	0.14 0.15	0.14 0.15
DN25x15	1x1/2	32x18 33.4x21.3	51	0.05 0.06	0.08 0.09	0.09 0.10	0.09 0.10	0.12 0.13	0.12 0.13
DN32x25	1 1/4x1	38x32 42.2x33.4	51	0.06 0.07	0.11 0.12	0.14 0.15	0.14 0.15	0.18 0.20	0.18 0.20
DN32x20	1 1/4x3/4	38x25 42.2x26.7	51	0.06 0.07	0.10 0.11	0.13 0.14	0.13 0.14	0.16 0.18	0.16 0.18
DN32x15	1 1/4x1/2	38x18 42.2x21.3	51	0.06 0.07	0.09 0.11	0.11 0.13	0.11 0.13	0.14 0.17	0.14 0.17
DN40x32	1 1/2x1 1/4	45x38 48.3x33.4	64	0.11 0.11	0.17 0.19	0.22 0.24	0.22 0.24	0.29 0.32	0.29 0.32
DN40x25	1 1/2x1	45x32 48.3x33.4	64	0.10 0.10	0.16 0.17	0.20 0.22	0.20 0.22	0.27 0.29	0.27 0.29
DN40x20	1 1/2x3/4	45x25 48.3x21.3	64	0.06 0.10	0.15 0.16	0.18 0.20	0.18 0.20	0.24 0.26	0.24 0.26
DN40x15	1 1/2x1/2	45x18 48.3x21.3	64	0.08 0.09	0.13 0.15	0.16 0.19	0.16 0.19	0.21 0.24	0.21 0.24
DN50x40	2x1 1/2	57x45 60.3x48.3	76	0.16 0.17	0.26 0.27	0.35 0.37	0.35 0.37	0.47 0.51	0.47 0.51
DN50x32	2x1 1/4	57x38 60.3x42.2	76	0.15 0.16	0.24 0.26	0.32 0.35	0.32 0.35	0.44 0.48	0.44 0.48
DN50x25	2x1	57x32 60.3x33.4	89	0.14 0.14	0.22 0.24	0.30 0.32	0.30 0.32	0.41 0.44	0.41 0.44
DN65x50	2 1/2x2	76x57 73.0x60.3	89	0.30 0.30	0.43 0.43	0.70 0.70	0.70 0.70	0.92 0.92	0.92 0.92
DN65x40	2 1/2x1 1/2	76x45 73.0x48.3	89	0.28 0.28	0.40 0.40	0.64 0.63	0.64 0.63	0.84 0.83	0.84 0.83
DN65x32	2 1/2x1 1/4	76x38 73.0x42.2	89	0.26 0.27	0.38 0.38	0.60 0.60	0.60 0.60	0.79 0.79	0.79 0.79
DN65x25	2 1/2x1	76x32 73.0x33.4	89	0.25 0.25	0.36 0.35	0.57 0.56	0.57 0.56	0.75 0.73	0.75 0.73
DN80x65	3x2 1/2	89x76 88.9x73.0	89	0.38 0.37	0.54 0.53	0.93 0.91	0.93 0.91	1.26 1.23	1.26 1.23
DN80x50	3x2	89x57 88.9x60.3	89	0.34 0.35	0.48 0.49	0.83 0.84	0.83 0.84	1.11 1.13	1.11 1.13

上述尺寸符合 GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9 标准。

Above dimensions acc.to GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9.

理论重量按 ASME B36.10M、B36.19M 标准壁厚测算。


Weights are approximate and based on manufacture's data , according to ASME B36.10M、B36.19M.

大小头 (同心、偏心)


Reducers(concentric and eccentric)



NO.1209016



NO.1209017



公称通径 Nominal diameter		外径 Outside diameter	端面至端面 的距离 End to end	理论重量 kg/pc Approx weight					
DN	NPS	D1xD2	H	sch5s	sch10s	sch20/lg	sch40s/std	sch80s/xs	sch80
DN80x40	3x1 1/2	89x45 88.9x48.3	89	0.31 0.32	0.45 0.45	0.76 0.78	0.76 0.78	1.02 1.05	1.02 1.05
DN90x80	3 1/2x3	101.6x88.9	102	0.50	0.72	1.29	1.77	1.77	-
DN90x65	3 1/2x2 1/2	101.6x73.0	102	0.46	0.66	1.12	1.12	1.51	1.51
DN90x50	3 1/2x2	101.6x60.3	102	0.43	0.62	1.10	1.10	1.40	1.40
DN90x40	4x3 1/2	101.6x48.3	102	0.41	0.58	1.03	1.03	2.41	2.41
DN100x90	3 1/2x1 1/2	114.3x101.6	102	0.57	0.82	1.55	1.55	1.94 2.02	1.94 2.02
DN100x80	4x3	108x89 114.3x88.9	102	0.52 0.54	0.75 0.77	1.41 1.46	1.41 1.46	1.82 1.87	1.82 1.87
DN100x65	4x2 1/2	108x76 104.3x73.0	102	0.49 0.50	0.70 0.72	1.32 1.35	1.32 1.35	1.82 1.87	1.82 1.87
DN100x50	4x2	108x57 114.3x60.3	102	0.44 0.48	0.64 0.68	1.19 1.27	1.19 1.27	1.64 1.75	1.64 1.75
DN125x100	5x4	113x108 141.3x114.3	127	1.04 1.11	1.27 1.35	2.35 2.50	2.35 2.50	3.33 3.55	3.33 3.55
DN125x90	5x3 1/2	141.3x101.6	127	1.06	1.29	2.38	2.38	3.38	3.38
DN125x80	5x3	133x89 141.3x88.9	127	0.97 1.01	1.18 1.23	2.17 2.27	2.17 2.27	3.07 3.22	3.07 3.22
DN125x65	5x2 1/2	133x76 141.3x73.0	127	0.92 0.85	1.12 1.16	2.06 2.14	2.06 2.14	2.91 3.02	2.91 3.02
DN150x125	6x5	159x133 168.3x141.3	140	1.40 1.48	1.71 1.81	3.42 3.64	3.42 3.64	5.14 5.47	5.14 5.47
DN150x100	6x4	159x108 168.3x114.3	140	1.29 1.37	1.58 1.67	3.15 3.36	3.15 3.36	4.72 5.03	4.72 5.03
DN150x90	6x3 1/2	168.3x101.6	140	1.32	1.61	3.23	3.23	4.83	4.83
DN150x80	6x3	159x89 168.3x88.9	140	1.21 1.26	1.48 1.53	2.96 3.07	2.96 3.07	4.41 4.58	4.41 4.58
DN200x150	8x6	219x159 219.1x168.3	152	2.00 2.04	2.70 2.75	5.65 5.77	5.65 5.77	8.55 8.73	8.55 8.73
DN200x125	8x5	219x133 219.1x141.3	152	1.90 1.93	2.56 2.60	5.35 5.44	5.35 5.44	8.09 8.23	8.09 8.23

上述尺寸符合 GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9 标准。

Above dimensions acc.to GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9.

理论重量按 ASME B36.10M、B36.19M 标准壁厚测算。


Weights are approximate and based on manufacture's data , according to ASME B36.10M、B36.19M.

大小头（同心、偏心）


Reducers(concentric and eccentric)



NO.1209018



NO.1209019



公称通径 Nominal diameter		外径 Outside diameter	端面至 端面的距离 End to end	理论重量 kg/pc Approx weight					
DN	NPS	D1xD2	H	sch5S	sch10S	sch20/LG	sch40S/STD	sch80S/XS	sch80
DN250x150	10x6	273x159 273.1x168.3	178	3.38 3.43	4.15 4.21	8.83 8.96	14.0 14.2	14.0 14.2	14.0 14.2
DN250x125	10x5	273x133 273.1x141.3	178	3.25 3.29	3.99 4.04	8.47 8.59	13.4 13.6	13.4 13.6	13.4 13.6
DN200x100	8x4	219x108 219.1x114.3	152	1.80 1.83	2.43 2.46	5.07 5.14	5.07 5.44	7.64 7.65	7.64 7.65
DN250x200	10x8	273x219	178	3.72	4.56	9.74	15.5	15.5	15.5
DN300x250	12x10	325x273 323.9x273.1	203	5.98 5.97	6.89 6.88	13.9 13.9	15.0 15.0	18.3 18.3	24.8 24.8
DN300x200	12x8	325x219 323.9x219.1	203	5.57 5.56	6.42 6.41	12.9 12.9	14.0 13.9	17.0 17.0	23.0 23.0
DN300x150	12x6	325x159 323.9x168.3	203	5.17 5.22	5.95 6.00	12.0 12.1	12.9 13.0	15.7 15.9	21.2 21.4
DN350x300	14x12	377x325 355.6x323.9	330	11.4 11.0	13.7 13.2	26.6 25.6	30.9 29.8	35.1 33.8	51.6 49.8
DN350x250	14x10	377x273 355.6x273.1	330	10.6 10.2	12.8 12.3	24.8 23.8	28.8 27.7	32.7 31.4	48.0 46.1
DN350x200	14x8	377x219 355.6x219.1	330	9.89 9.46	11.9 11.4	23.0 22.0	26.7 25.5	30.3 29.0	44.5 42.5
DN350x150	14x6	377x159 355.6x168.3	330	9.63 9.22	11.0 10.5	21.1 20.2	24.5 23.5	27.8 26.6	40.7 38.9
DN400x350	16x14	426x377 406.4x355.6	356	14.9 14.1	16.9 16.1	32.9 31.2	43.5 41.2	43.5 41.2	71.7 67.9
DN400x300	16x12	426x325 406.4x323.9	356	14.0 13.6	16.0 15.4	31.0 29.9	40.9 39.5	40.9 39.5	67.4 65.1
DN400x250	16x10	426x273 406.4x273.1	356	13.2 12.7	15.0 14.5	29.1 28.1	38.4 37.1	38.4 37.1	63.1 60.9
DN400x200	16x8	426x219 406.4x219.1	356	12.4 11.9	14.1 13.6	27.3 26.2	36.0 34.6	36.4 34.6	59.1 56.7
DN400x150	16x6	426x159 406.4x168.3	356	11.5 9.96	13.1 12.7	25.3 24.5	33.3 32.3	33.3 32.3	54.5 52.7
DN450x400	18x16	478x426 457x406.4	381	17.9 17.1	20.4 19.5	39.7 37.9	58.8 56.1	52.6 50.1	96.1 91.6
DN450x350	18x14	478x377 457x355.6	381	17.1 16.2	19.4 18.5	37.7 35.8	55.8 53.0	49.9 47.4	91.1 86.3
DN450x300	18x12	478x325 457x323.9	381	16.2 15.7	18.5 17.9	35.8 34.7	53.0 51.2	47.4 45.8	86.3 83.4

上述尺寸符合 GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9 标准。


Above dimensions acc.to GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9.

理论重量按 ASME B36.10M、B36.19M 标准壁厚测算。


Weights are approximate and based on manufacture's data , according to ASME B36.10M、B36.19M.

大小头 (同心、偏心)

Reducers(concentric and eccentric)

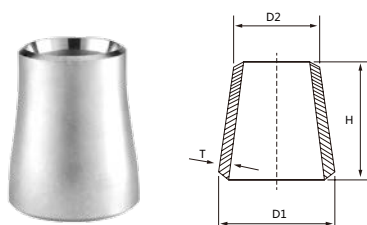

NO.1209020



NO.1209021

公称通径 Nominal diameter		外径 Outside diameter	端面至 端面的距离 End to end	理论重量 kg/pc Approx weight					
DN	NPS	D1xD2	H	sch5S	sch10S	sch20/LG	sch40S/STD	sch80S/XS	sch80
DN450x250	18x10	478x273 457x273.1	381	15.4 14.8	17.6 16.9	34.1 32.8	50.3 48.4	45.0 43.3	81.8 78.6
DN450x200	18x8	478x219 457x219.1	381	14.5 14.0	16.5 15.9	32.0 30.8	47.3 45.5	42.3 40.7	76.7 73.7
DN500x450	20x18	529x478 508x457	508	30.4 29.1	35.2 33.7	59.1 56.6	92.5 88.6	78.2 74.9	156 150
DN500x400	20x16	529x426 508x406.4	508	28.9 27.7	33.4 32.0	56.2 53.8	87.9 84.1	74.4 71.1	149 142
DN500x350	20x14	529x377 508x355.6	508	27.6 26.3	31.9 30.4	53.6 51.0	83.8 79.7	70.9 67.4	142 135
DN500x300	20x12	529x325 508x323.9	508	26.2 25.4	30.3 29.4	50.8 49.3	79.4 77.0	67.2 65.1	134 130
DN500x250	20x10	529x273 508x273.1	508	24.8 24.0	28.7 27.8	48.2 26.7	75.2 72.8	63.7 61.7	127 123
DN500x200	20x8	529x219 508x219.1	508	23.5 22.7	27.1 26.2	45.5 43.9	70.9 68.5	60.1 58.0	119 115
DN550x500	22x20	559x508	508	32.1	37.3	62.7	-	83.0	182
DN550x450	22x18	559x457	508	30.8	35.0	59.9	-	79.3	174
DN550x400	22x16	559x406.4	508	29.4	34.0	57.2	-	75.7	165
DN550x350	22x14	559x355.6	508	28.0	32.5	54.5	-	72.1	157
DN600x550	24x22	610x559	508	28.0	46.8	68.8	-	91.2	215
DN600x500	24x20	630x529 610x508	508	40.4 39.2	46.2 44.9	68.0 66.0	123 119	90.1 87.4	212 206
DN600x450	24x18	630x478 610x457	508	39.1 37.6	44.7 43.1	65.8 63.3	119 114	87.1 83.9	205 197
DN600x400	24x16	630x426 610x406.4	508	37.5 36.1	43.0 41.3	63.1 60.7	114 110	83.6 80.4	197 189
DN650x600	26x24	660x610	610	-	-	89.8	-	119	-
DN650x550	26x22	660x559	610	-	-	86.3	-	114	-
DN650x500	26x20	660x508	610	-	-	83.0	-	110	-

上述尺寸符合 GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9 标准。


Above dimensions acc.to GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9.

理论重量按 ASME B36.10M、B36.19M 标准壁厚测算。

Weights are approximate and based on manufacture's data , according to ASME B36.10M、B36.19M.

管帽

Caps



NO.1209022

公称通径 Nominal diameter		外径 Outside diameter	背面至 端面的距离 back to end		(E 型) 理论重量 kg/pc (E) Approx weight					
DN	NPS	OD	E	E1	sch5S	sch10S	sch20/LG	sch40S/STD	sch80S/XS	sch80
DN15	1/2	18 21.3	25	25	0.019 0.022	0.024 0.028	0.031 0.037	0.031 0.037	0.042 0.050	0.42 0.060
DN20	3/4	25 26.7	25	25	0.027 0.029	0.033 0.035	0.045 0.048	0.045 0.048	0.060 0.065	0.060 0.065
DN25	1	32 33.7	38	38	0.049 0.052	0.083 0.087	0.101 0.106	0.101 0.106	0.136 0.143	0.136 0.143
DN32	1 1/4	28 42.4	38	38	0.058 0.065	0.099 0.110	0.126 0.141	0.126 0.141	0.173 0.193	0.173 0.193
DN40	1 1/2	45 48.3	38	38	0.071 0.076	0.118 0.127	0.158 0.169	0.158 0.169	0.218 0.234	0.218 0.234
DN50	2	57 60.3	38	44	0.094 0.099	0.156 0.165	0.221 0.234	0.221 0.234	0.313 0.331	0.313 0.331
DN65	2 1/2	76 73.0	38	51	0.167 0.161	0.241 0.232	0.409 0.393	0.409 0.393	0.555 0.534	0.555 0.534
DN80	3	89	51	64	0.254	0.367	0.660	0.660	0.917	0.917
DN90	3 1/2	101.6	64	76	0.355	0.512	0.965	0.965	1.36	1.36
DN100	4	108 114.3	64	76	0.387 0.410	0.561 0.594	1.11 1.17	1.11 1.17	1.58 1.67	1.58 1.67
DN125	5	133 139.7 141.3	76	89	0.769 0.808 0.817	0.945 0.993 1.00	1.82 1.91 1.93	1.82 1.91 1.93	2.65 2.78 2.81	2.65 2.78 2.81
DN150	6	159 168.3 165.2	89	102	1.07 1.13 1.11	1.31 1.39 1.36	2.74 2.90 2.85	2.74 2.90 2.85	4.22 4.47 4.39	4.22 4.47 4.39
DN200	8	219 216.1	102	127	1.76 1.74	2.38 2.35	5.19 5.13	5.19 5.13	8.05 7.95	8.05 7.95
DN250	10	273 267.4	127	152	3.36 3.29	4.14 4.05	9.15 8.96	9.15 8.96	12.5 12.2	16.3 16.4

上述尺寸符合 GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9 标准。


Above dimensions acc.to GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9.

理论重量按 ASME B36.10M、B36.19M 标准壁厚测算。

Weights are approximate and based on manufacture's data , according to ASME B36.10M、B36.19M.

管帽

Caps



NO.1209023

公称通径 Nominal diameter		外径 Outside diameter	背面至 端面的距离 back to end		(E 型) 理论重量 kg/pc (E) Approx weight					
DN	NPS	OD	E	E1	sch5S	sch10S	sch20/LG	sch40S/STD	sch80S/XS	sch80
DN300	12	325	152	178	5.12	6.40	13.5	14.6	17.9	28.3
		323.9			5.11	6.39	13.3	14.4	17.7	27.1
		318.5			5.02	6.27	13.2	14.2	17.3	26.8
DN350	14	377	165	191	6.00	8.46	16.9	19.9	22.5	38.5
		355.6			5.66	7.87	15.9	18.8	21.2	35.2
DN400	16	426	178	203	6.93	7.91	21.0	28.2	28.0	52.0
		406.4			6.60	7.53	20.0	20.1	26.7	49.1
DN450	18	478	203	229	7.90	9.01	26.9	43.8	35.8	76.1
		457.2			7.52	8.58	25.6	41.4	34.1	69.1
DN500	20	529	229	254	10.5	12.02	33.2	57.6	44.2	103
		508.0			10.1	11.7	31.9	54.0	42.5	93.7
DN550	22	559	254	254	12.1	22.6	38.8	78.3	51.7	116
DN600	24	630	267	305	14.8	16.9	46.5	92.3	61.9	177
		610			14.3	16.4	45.1	90.1	60.1	160
DN650	26	660	267	-	23.3	26.1	50.5	103.5	67.3	
DN700	28	720	267	-	27.1	32.4	56.9	151.1	75.6	
		711			38.7	49.7	56.2	121.3	74.9	
DN750	30	762	267	-	41.4	51.7	62.1	117.3	82.8	
DN800	32	820	267	-	43.4	58.3	70.6	127	92.0	
		813			43.1	57.7	70.0	126	91.2	
DN850	34	864	267	-	57.2	68.5	78.7	144	105	
DN900	36	920	267	-	60.3	74.6	86.3	172	115	
		914			59.1	72.1	85.7	171	114	

上述尺寸符合 GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9 标准。

Above dimensions acc.to GB/T 12459、GB/T 13401、SH 3408、SH 3409、HG/T 21635、HG/T 21631、SY/T 0510、ASME B16.9.

理论重量按 ASME B36.10M、B36.19M 标准壁厚测算。

Weights are approximate and based on manufacture's data , according to ASME B36.10M、B36.19M.